


Łańcuchy sworzniowe typ C
Gall's chains type C
PN-74/M-84110, DIN 8150
Sworznie nitowane bez podkładek
Without washers

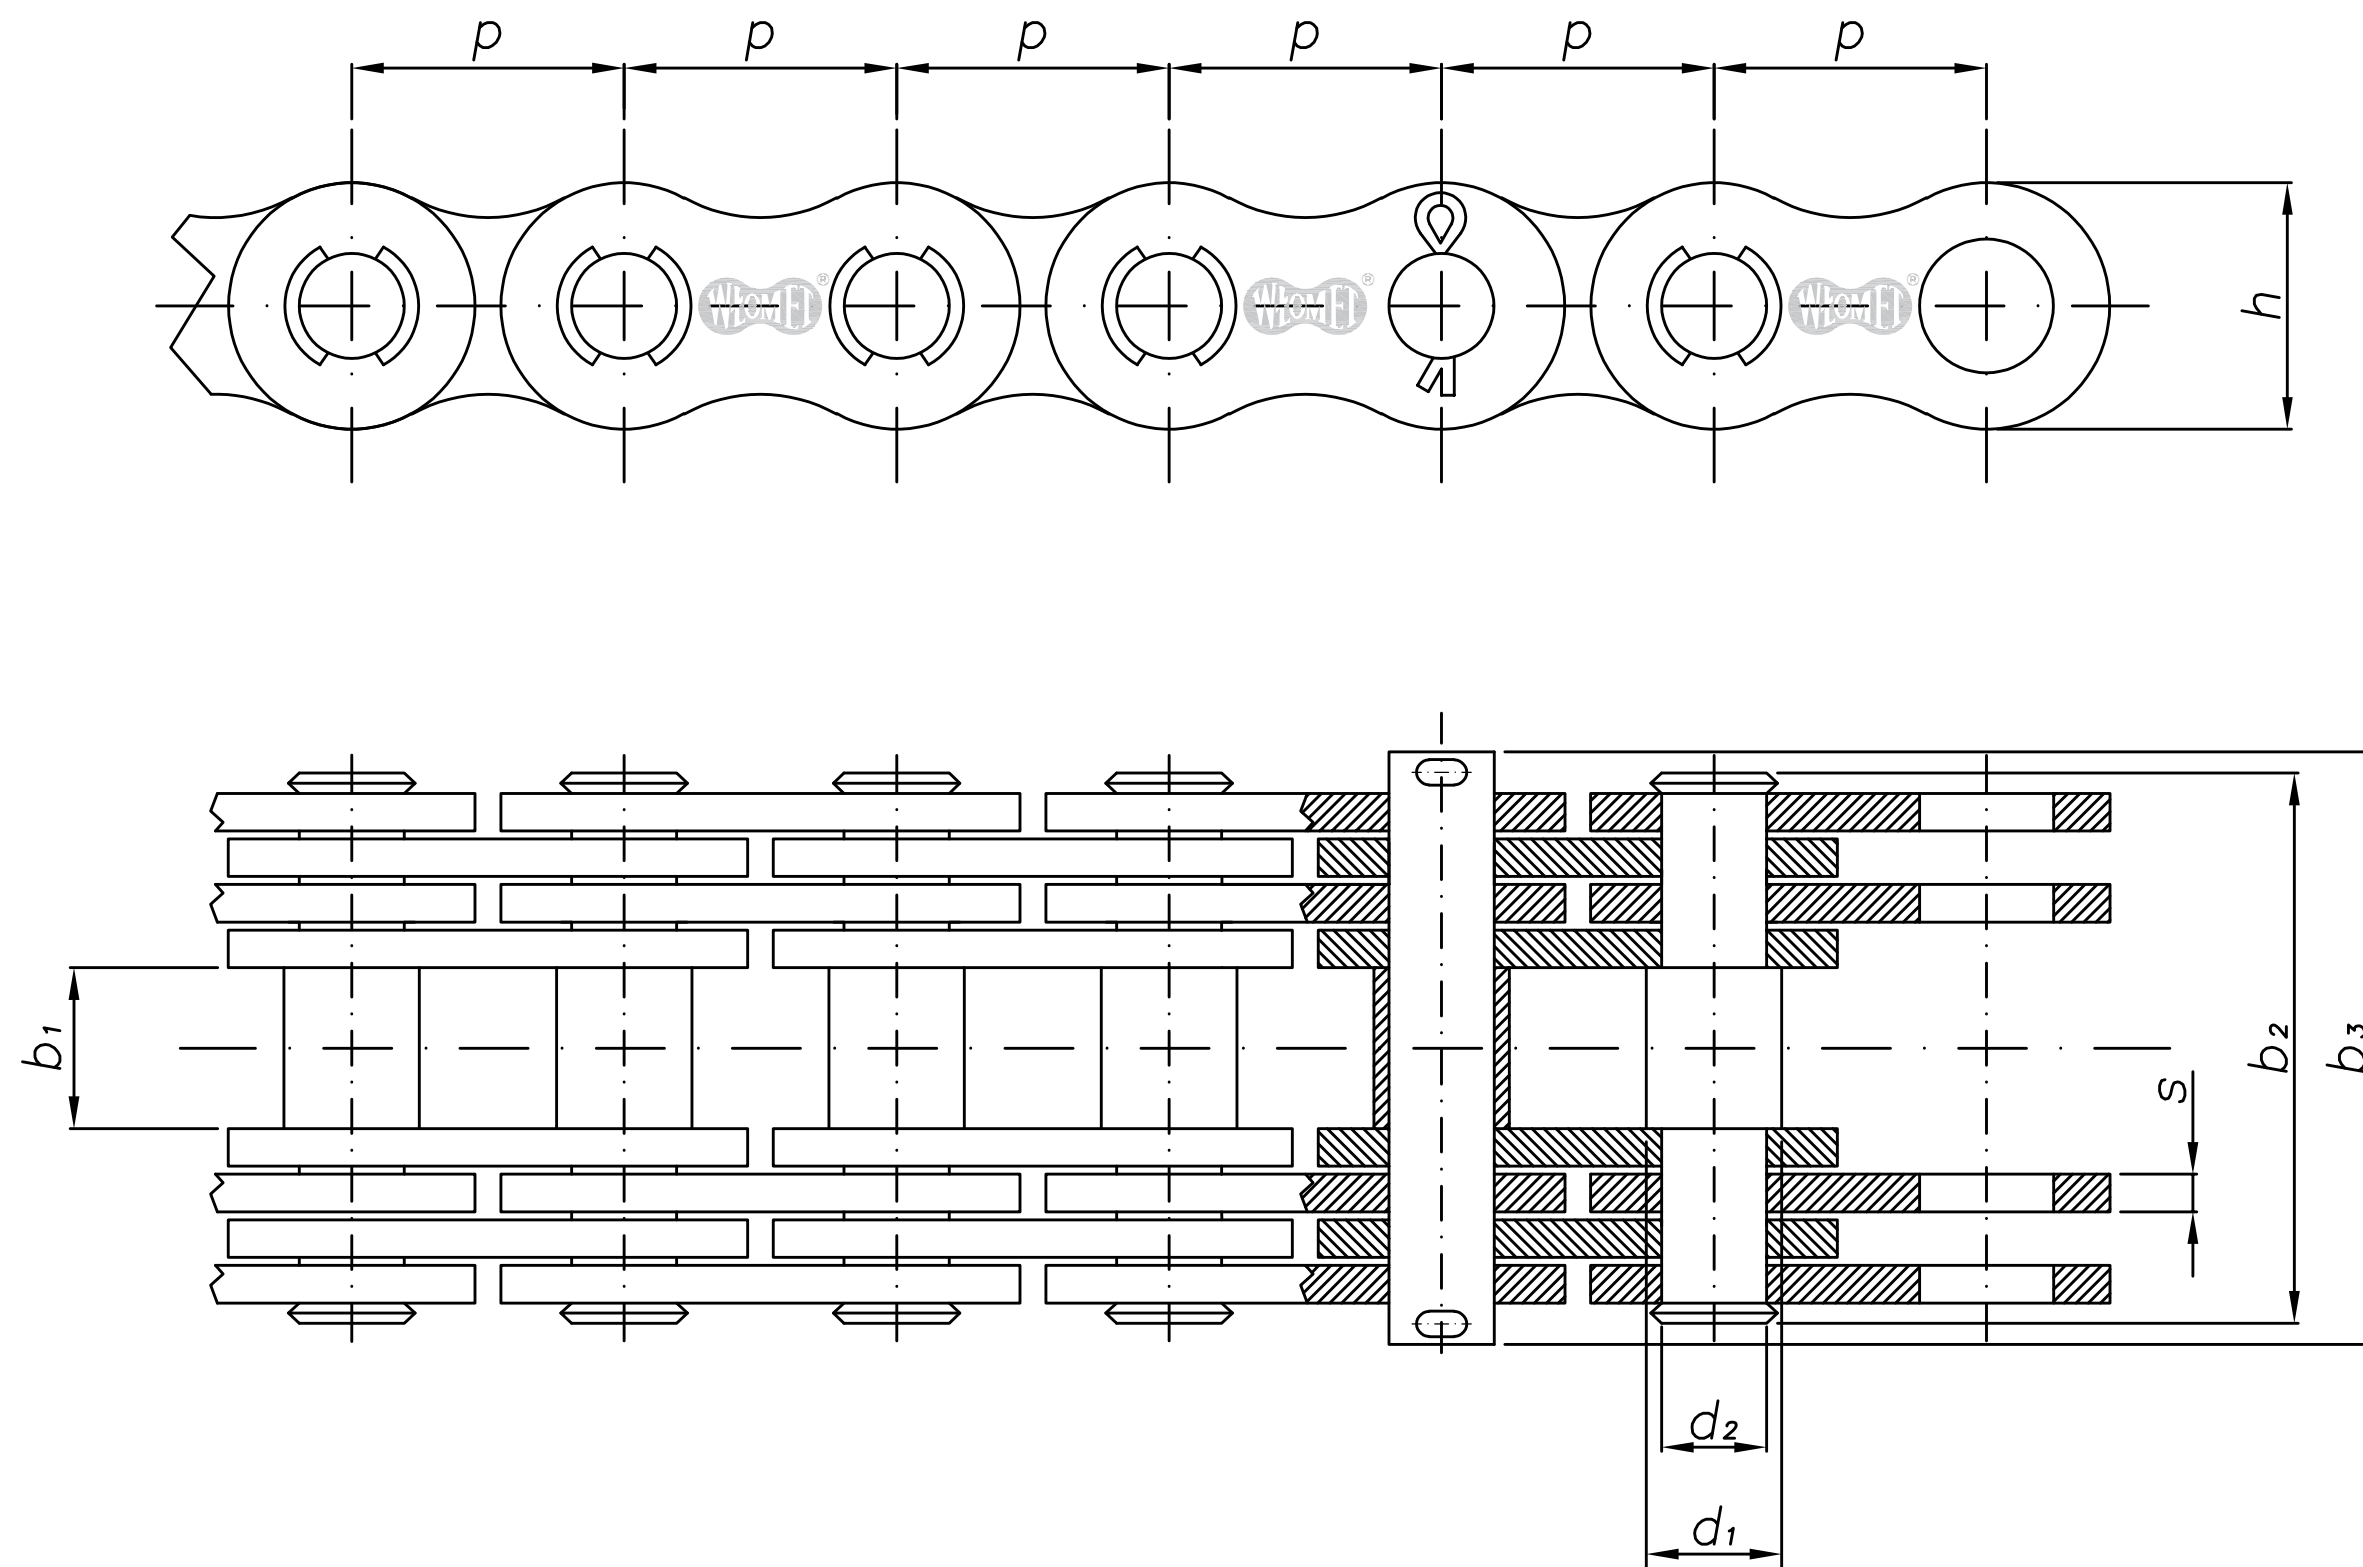

Łańcuchy sworzniowe typ C

Gall's chains type C

PN-74/M -84110, DIN 8150

p	d ₁	d ₂ max	b ₁ min	b ₂ max	b ₃ max	h max	s max	Liczba płytek	F min	Q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
1	2	3	4	5	6	7	8	9	10	11
Sworznie nitowane bez podkładek										
20,00	8,00	6,00	15,00	28,00	33,00	15,00	2,00	2	12,50	1,10
25,00	10,00	8,00	18,00	36,00	42,00	18,00	3,00	2	25,00	1,75
30,00	11,00	9,00	20,00	51,00	58,00	20,00	3,00	4	40,00	3,40
35,00	12,00	10,00	22,00	53,00	61,00	26,00	3,00	4	60,00	4,50
40,00	14,00	12,00	25,00	59,00	66,00	30,00	3,00	4	80,00	4,70
45,00	17,00	14,00	30,00	63,00	70,00	35,00	3,00	4	100,00	6,40

F – obciążenie zrywające (min.)

Q – masa 1 mb łańcucha

F – breaking load (min.)

Q – weight kg/m