


Łańcuchy sworzniowe typ L
Gall's chains type L
PN-74/M-84110, DIN 8151

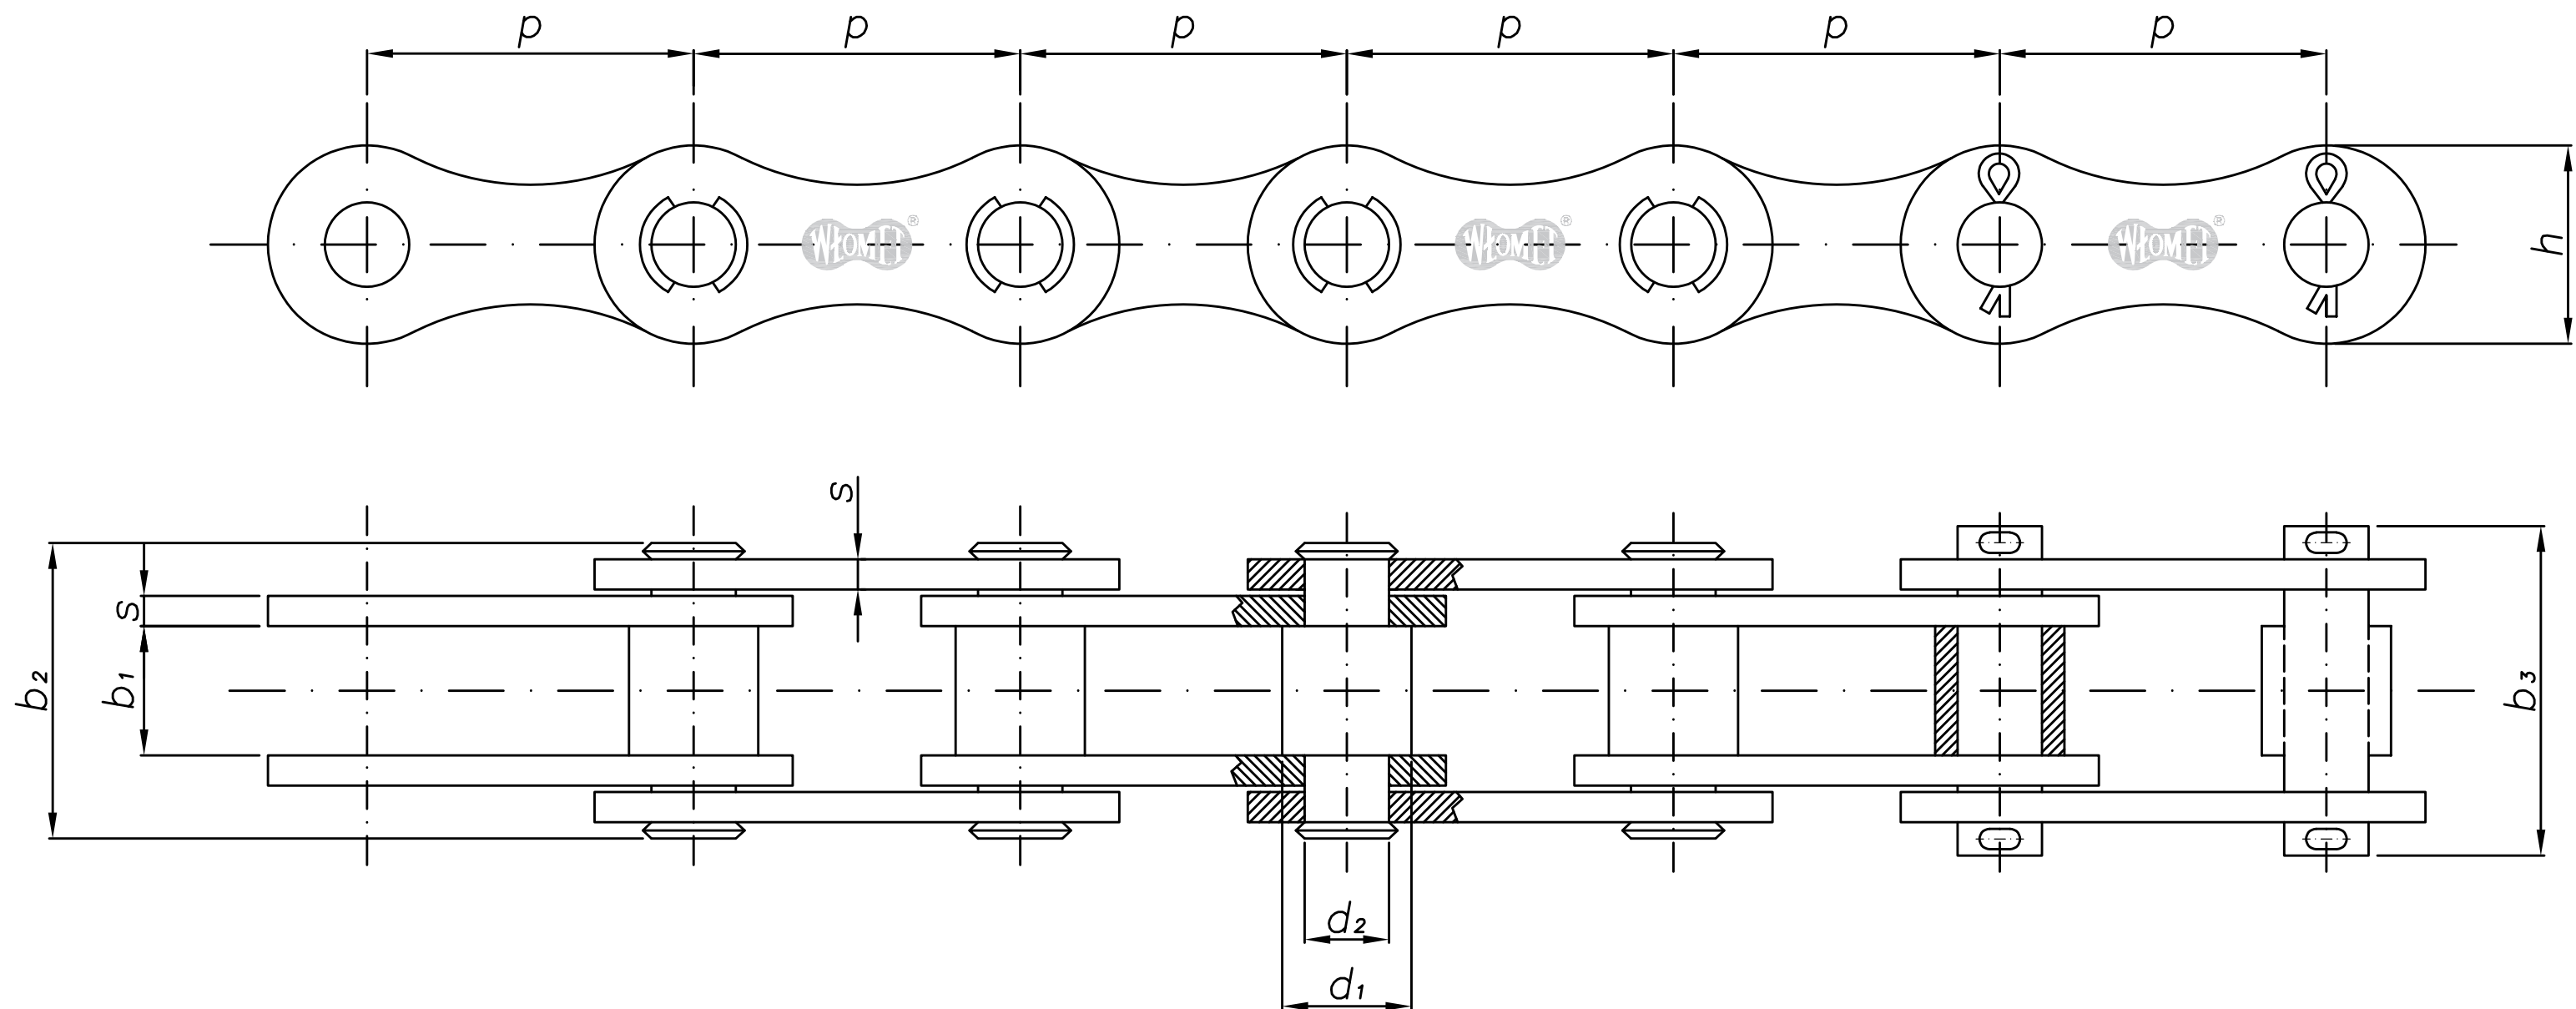

Łańcuchy sworzniowe typ L

Gall's chains type L

PN-74/M -84110, DIN 8151

p	d ₁	d ₂ max	b ₁ min	b ₂ max	b ₃ max	h max	s max	F min	Q
	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
1	2	3	4	5	6	7	8	9	10
35,00	8,00	6,00	15,00	27,00	32,00	9,00	2,00	15,50	0,70
40,00	10,00	8,00	18,00	35,00	41,00	10,00	3,00	25,00	1,25
50,00	11,00	9,00	20,00	50,00	57,00	13,00	6,00	40,00	2,80
60,00	12,00	10,00	22,00	52,00	60,00	17,00	6,00	60,00	3,14
70,00	14,00	12,00	25,00	57,00	65,00	19,00	6,00	80,00	3,31
80,00	17,00	14,00	30,00	62,00	69,00	22,00	6,00	100,00	4,50

F – obciążenie zrywające (min.)

Q – masa 1 mb łańcucha

F – breaking load (min.)

Q – weight kg/m